



## Features

- Advanced new Dual Concentric driver design utilizing Omnimagnet technology
- Torus Ogive Waveguide device for improved broadband directivity
- Improved time alignment and phase coherence, delivering even better sonic performance
- High power and high sensitivity with extended frequency response and very low distortion
- Improved LF performance for applications where genuine bottom-end is a must
- Low insertion-loss, 60 watt line transformer for a more powerful and dynamic performance
- Convenient front-tapping switch for settings
- Magnetically-adhering grille system for easy custom painting and optional Arco designer grilles for minimal architectural impact
- Four-clamp self-aligning system
- UV resistant baffle and grille
- Packaged with classic grille, tile rails and C-ring for quick and easy installation and simple stocking logistics
- Five year warranty

## Applications

- Voice Alarm Systems
- Multizone Foreground Music & Paging Systems
- Boardrooms & Offices
- Business Music Systems
- Airports, Convention Centres, Hotels
- Reception / Waiting Rooms
- Houses of Worship
- Retail Outlets / Shopping Malls
- Lounges / Bars
- Cruise Ships
- Courtrooms

## Product description

The Tannoy CMS 603DC BM is a full bandwidth, high power-handling and high sensitivity loudspeaker built around CMS 3.0 – the third generation of Tannoy's revolutionary Ceiling Monitor System technology. Based on an all-new evolution of Tannoy's proprietary Dual Concentric point-source driver, the CMS 603DC BM has been fundamentally re-engineered to deliver wider and more consistent broadband directivity, even greater intelligibility, and a more accurate and linear response.

The new Dual Concentric driver design features revolutionary Omnimagnet™ technology and unique patent-pending Torus Ogive Waveguide™ device, together providing more consistent and controlled directivity along with improved high frequency response. Improved time-alignment and greater coherence between LF and HF results in a wider sweet spot for enhanced performance both on- and off-axis. The re-designed baffle provides a subtle extension to the waveguide effect for additional sonic benefits.







The CMS 603DC BM also features extra clamp extension to accommodate thicker ceiling panels, and a locking design that prevents inadvertent over-screwing. Magnetic grille attachment enables easy removal and fitting for custom painting and tapping changes with grilles now available as either traditional style (inset in bezel) or new Arco™ style which conceals the entire unit for more architect-friendly aesthetic appeal.

The CMS 603DC BM utilizes a 16 ohm driver, making it ideal for use in high performance low-impedance systems (with optimized performance when used in conjunction with Lab.gruppen LUCIA amplifiers). A low-insertion loss 60 W transformer is included, with convenient front bezel switching for taps at 60 W, 30 W and 15 W, with an additional 7.5 W tap for traditional constant voltage systems.


The CMS 603DC BM is supplied with an integral zinc plated steel back-can, ready to install as a single unit and feature an integrated, recessed termination box. The removable locking connector has screw terminals for secure wire termination and loop-thru facility. Strain relief is provided by a clamping mechanism for use with plenum-rated cable or conduit, while new spring-loaded and self-aligning clamps make for even quicker and easier installation. All models are supplied with classic grille, two tile support rails and one C-ring; Arco grille and plaster (mud) ring are available as optional accessories.

## Physical data

<b>Bezel diameter:</b>	274.0 mm (10.79")	<b>Hole Cutout Diameter:</b>	253.0 mm (9.96")
<b>Front of ceiling to rear of backcan:</b>	255.8 mm (10.07")	<b>Front of ceiling to top of safety loop:</b>	273.3 mm (10.76")




### 1 m on-axis Frequency Response

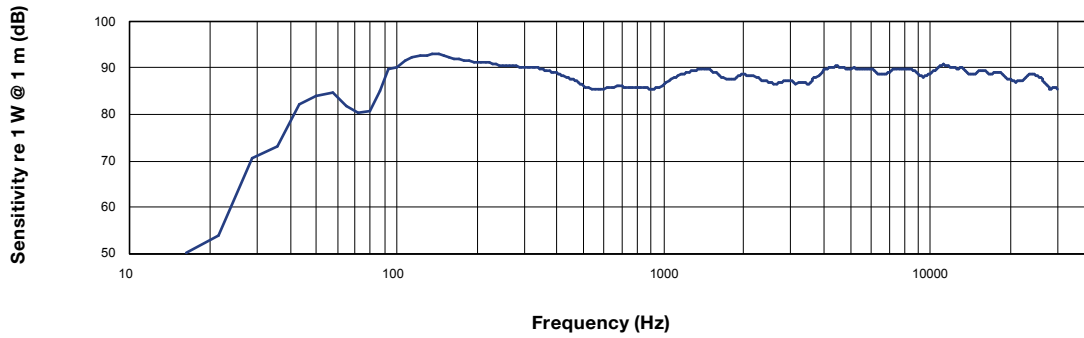


### Anechoic Frequency Response

### Impedance vs frequency

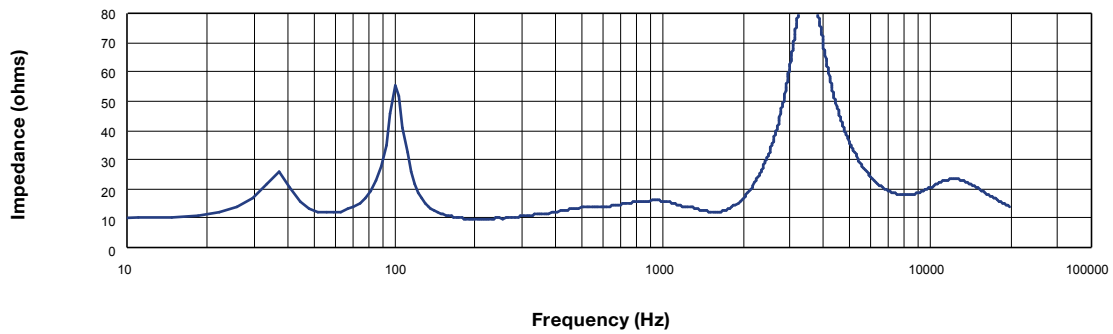


### Impedance

### Off-axis Frequency Response

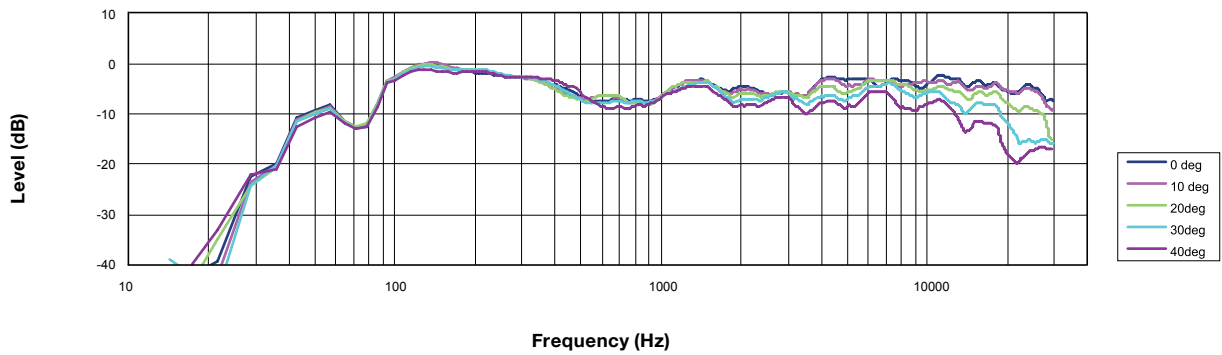


### Off Axis Response

Beamwidth vs Frequency

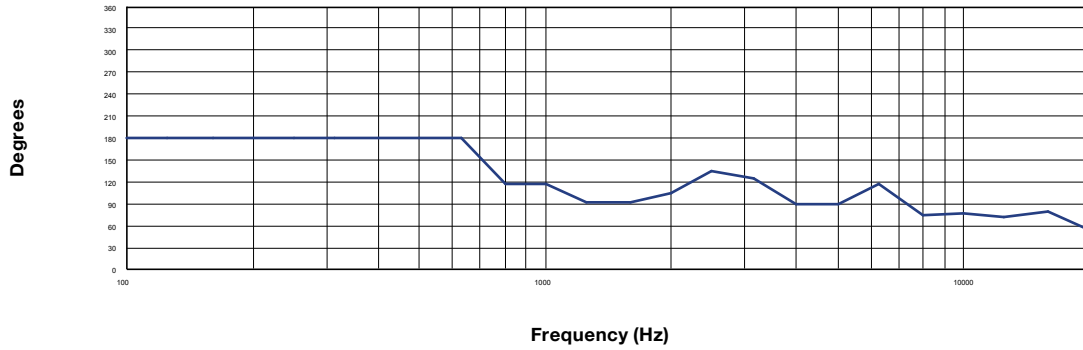

Beamwidth

Directivity Index (DI)






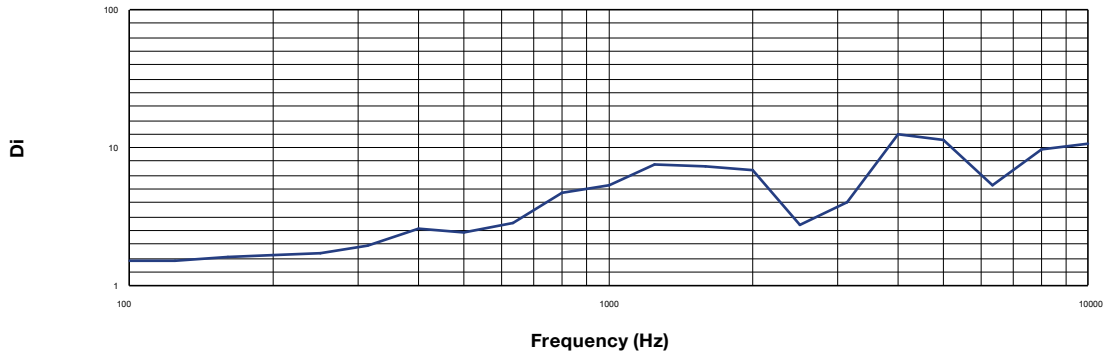


Directivity Index

# Technical Data Sheet

## Polar plots (1/3 octave)

# CMS 603DC BM

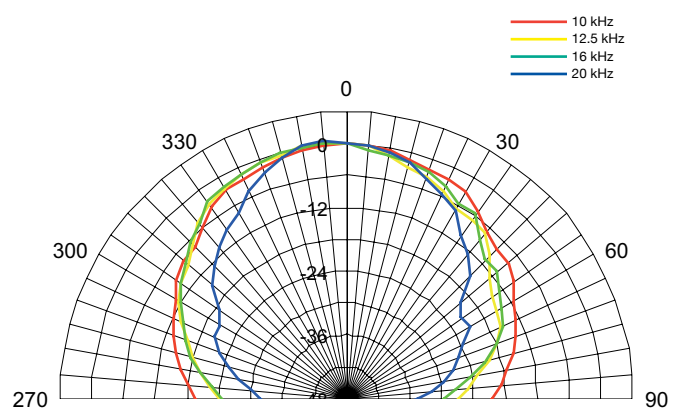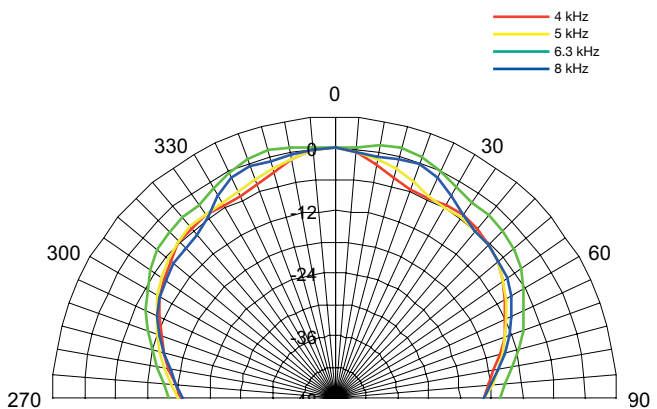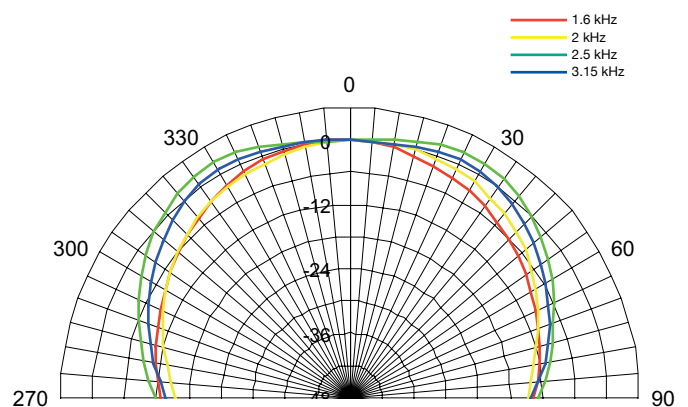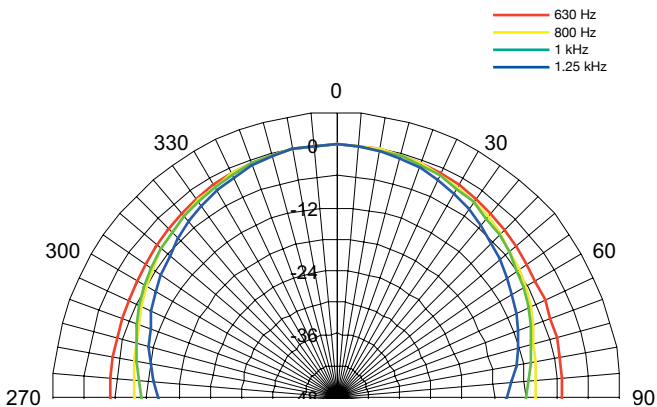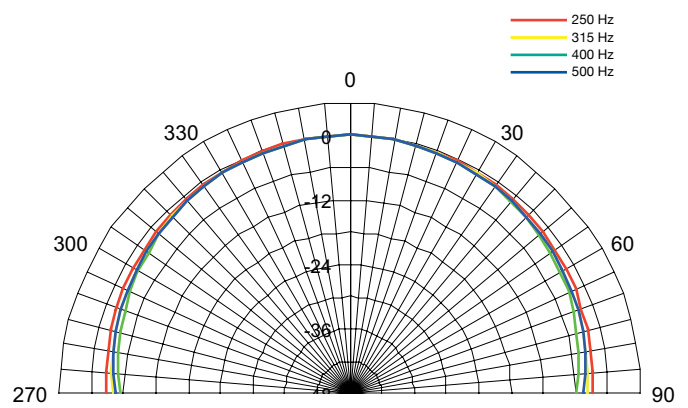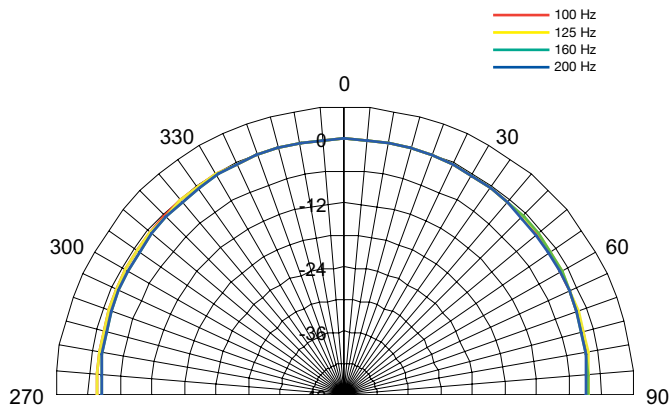

# Technical Data Sheet

## Specifications

# CMS 603DC BM

### Performance

<b>Frequency response (-3 dB) <sup>(1)</sup></b>	75 Hz - 30 kHz
<b>Frequency range (-10 dB) <sup>(1)</sup></b>	50 Hz - 30 kHz
<b>System sensitivity (1 W @ 1 m) <sup>(2)</sup></b>	91 dB (1 W = 4 V for 16 Ohms)
<b>Nominal Coverage Angle</b>	90 degrees conical
<b>Power Handling <sup>(3)</sup></b>	
Average	80 W
Programme	160 W
Peak	320 W
<b>Recommended Amplifier Power</b>	160 W @ 16 ohms
<b>Nominal Impedance (Lo, Z)</b>	16 ohms
<b>Rated maximum SPL</b>	
Average	110 dB
Peak	116 dB
<b>Transformer Taps (via front rotary switch)</b>	
70 V	60 W (83 Ω) / 30 W (165 Ω) / 15 W (330 Ω) / 7.5 W (660 Ω) / OFF & low impedance operation
100 V	60 W (165 Ω) / 30 W (330 Ω) / 15 W (660 Ω) / OFF & low impedance operation

### Transducers

<b>Dual Concentric point source driver</b>	1 x 165 mm (6.5") Dual Concentric driver, using Omnimagnet technology
<b>Low Frequency</b>	44 mm (1.75") voice coil, treated multi fiber paper pulp cone
<b>High Frequency</b>	25 mm (1.00") PEI dome

### Physical

<b>Enclosure</b>	
Backcan	Zinc plated steel
Baffle	Reflex loaded UL 94V-0 rated ABS
Grille	Steel, with weather resistant coating
<b>Safety Features</b>	Safety ring located at rear of enclosure for load bearing safety bond
<b>Clamping Design</b>	Security toggle clamp Min / Max clamping range 9.5 mm (0.37") / 60 mm (2.36") Recommended clamp torque: 1.5 Nm
<b>Backcan Options</b>	Complete with fixed backcan
<b>Cable Entry Options</b>	Cable clamp & squeeze connector for conduit up to 22 mm
<b>Connectors</b>	Removable locking connector with screw terminals with "loop through" facility
<b>Compliance</b>	UL-1480, UL-2043, CE
<b>Dimensions</b>	
Bezel diameter	274.0 mm (10.79")
Front of ceiling to rear of backcan	255.8 mm (10.07")
Front of ceiling to top of safety loop	273.3 mm (10.76")
<b>Hole cutout diameter (all models)</b>	253 mm (9.96")
<b>Net Weight (ea)</b>	6.6 kg (14.56 lbs)
<b>Included Accessories</b>	C-Ring, tile-bridge kit, paint mask, cut-out template, grille
<b>Optional Accessories</b>	Plaster (mud) ring, Arco grille
<b>Packed Quantity</b>	2

### Ordering Information

Part Number	Colour
8001 7440 CMS 603DC BM	White / Paintable
8001 4181 CMS 603 Plaster (Mud) Ring	Zinc Plated Steel
8001 7890 CMS 603 Arco Grille	White / Paintable



LISTED  
UL-1480,  
UL-2043

#### Notes:

1. Average over stated bandwidth. Measured in an IEC baffle in an Anechoic Chamber
2. Unweighted pink noise input, measured at 1 metre on axis
3. Long term power handling capacity as defined in EIA - 426B test

A full range of measurements, performance data, CLF and Ease™ Data for CMS 603DC BM can be downloaded from [www.tannoypro.com](http://www.tannoypro.com).

Tannoy operates a policy of continuous research and development. The introduction of new materials or manufacturing methods may introduce variations in actual performance; however, actual performance always will equal or exceed the published specifications, which Tannoy reserves the right to alter without prior notice. Please verify the latest specifications when dealing with critical applications.

Copyright (c) 2015 Tannoy Limited. All rights reserved.

**Technical Data Sheet**

Notes

**CMS 603DC BM**

**Technical Data Sheet**

Notes

**CMS 603DC BM**

**Technical Data Sheet**

Notes

**CMS 603DC BM**